
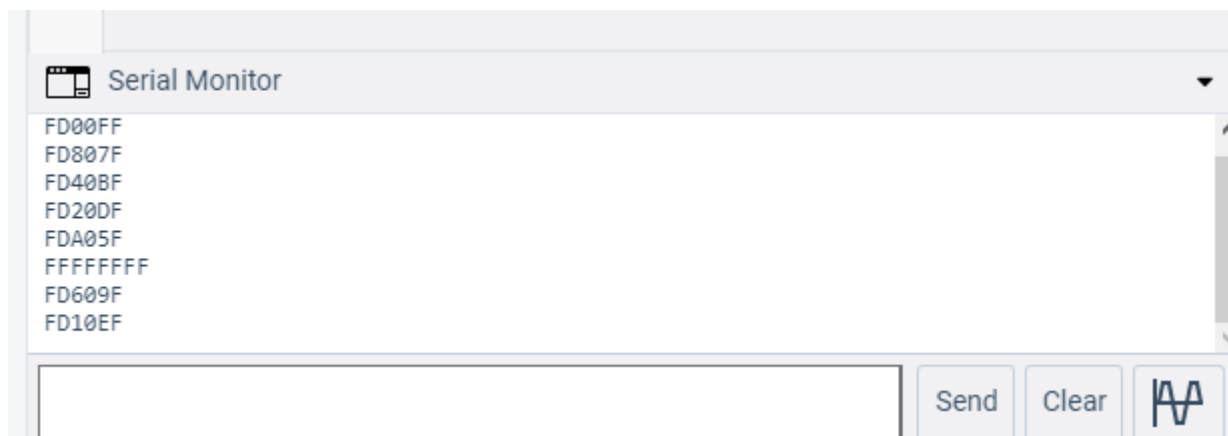


## ΕΜΦΑΝΙΣΗ ΔΕΚΑΞΑΔΙΚΩΝ ΚΩΔΙΚΩΝ ΤΩΝ ΠΛΗΚΤΡΩΝ ΤΟΥ ΤΗΛΕΧΕΙΡΙΣΤΗΡΙΟΥ

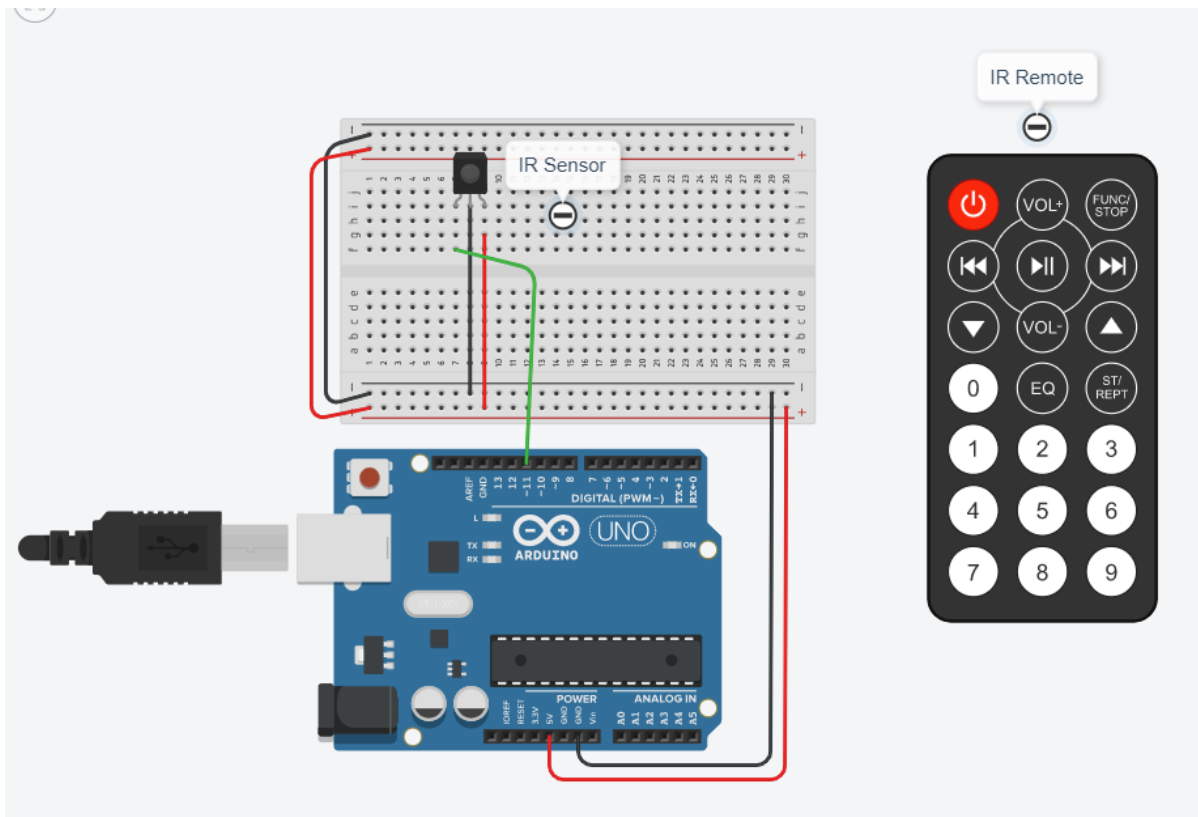

```
#include <IRremote.h>

int RECV_PIN = 11; //define input pin on Arduino

IRrecv irrecv(RECV_PIN);

decode_results results;

void setup() {
  Serial.begin(9600);
  irrecv.enableIRIn(); // Start the receiver
}

void loop() {
```

```
if (irrecv.decode(&results)) {  
  Serial.println(results.value, HEX);  
  irrecv.resume(); // Receive the next value  
}  
}
```